




TILES

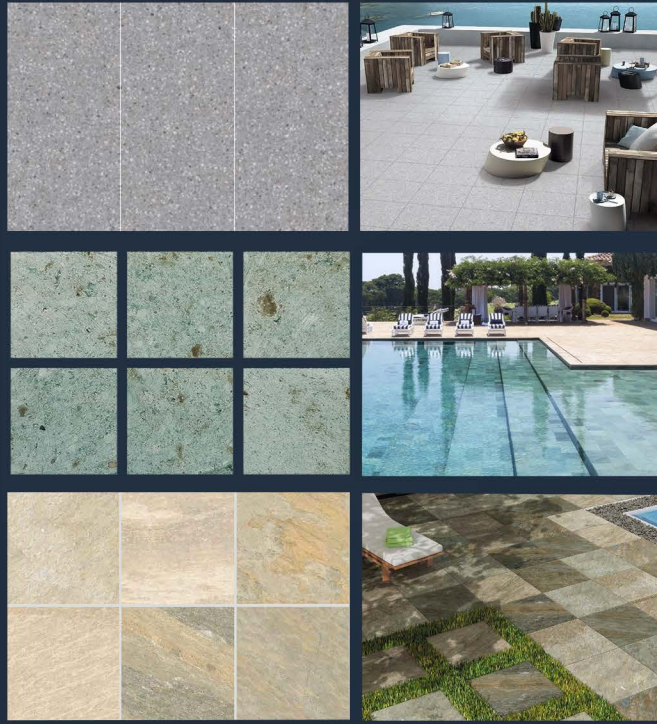

GRANITE

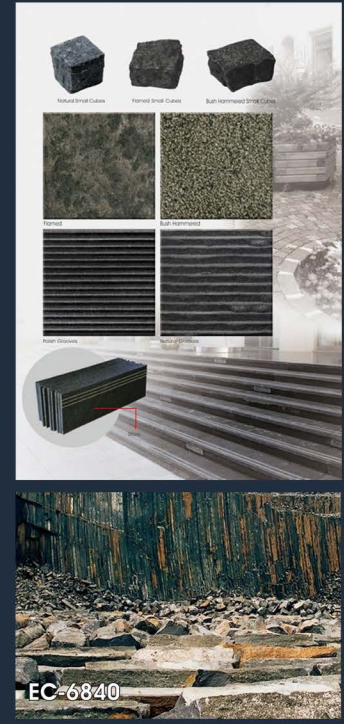

MARBLE

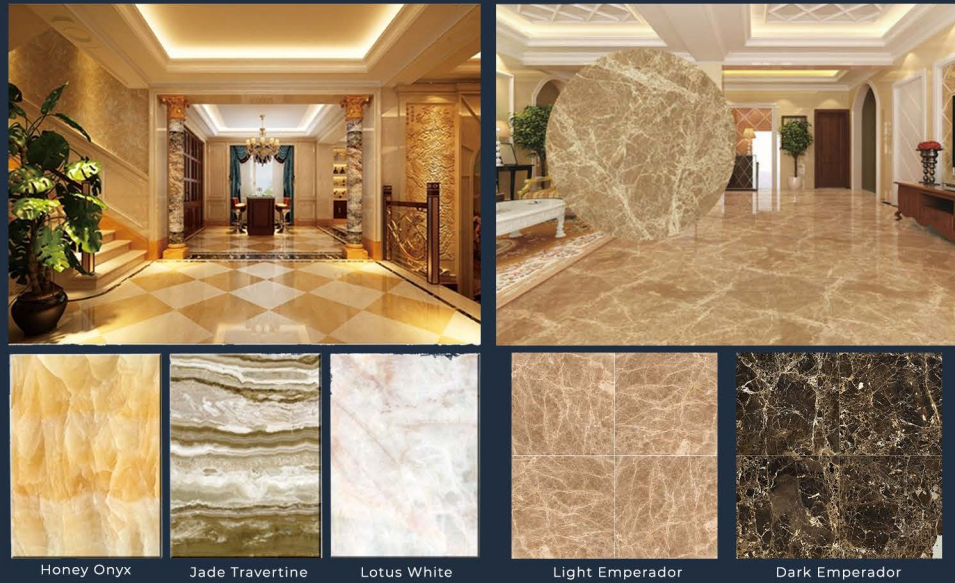

*For more choices of our Tile, Marble and Granite products, visit our website www.globalsource.com.ph

LOCKSETS



WELDING ROD



Thickness : 3.2mm & 2.5mm
 AVAILABLE IN:
 • 20KG box with 4pcs 5KG box
 • 5KG box



GLOBALSOURCE MARKETING CORPORATION

HEAD OFFICE

G/F Yupangco Building #1606 Trade Street, Corner Investment Drive
 Madrigal Business Park, Alabang, Muntinlupa City
 +63 917 545-2000 / +63 2 8293-7000

MAIN WAREHOUSE

Blk 8, Lot 11, Cavite Light Industrial Park
 Brgy. Maguyam, Silang Cavite 4118

MANUFACTURING

Blk 10, Lot 3, Cavite Light Industrial Park
 Brgy. Maguyam, Silang Cavite 4118

BRANCHES

ILOILO

Aleoson Road, Brgy. Jibao-an
 Pavia, 5001 Iloilo
 +63 917 132-8236

PAMPANGA

Warehouse 10, situated in Calulut-Panipuan
 Road, Mexico, 2021 Pampanga
 +63 917 711-2330

CEBU

Warehouse 4, C.P. Batiller St., Umapad
 Mandaue City, Cebu
 +63 917 709-7177 / +63 917 105-4078

DAVAO

Eliang Street, Brgy. Upper
 Tibungco, 8000 Davao City
 +63 917 621 9264

www.globalsource.com.ph
sales@globalsource.com.ph
[gsmc.ph](https://www.facebook.com/gsmc.ph)

Copyright 202 - All rights reserved
 March 2025

GSMC

CREATING SOLUTIONS,
 Connecting Opportunities!



**GLOBALSOURCE
 MARKETING CORPORATION**

A Subsidiary of
SFC GROUP

www.globalsource.com.ph

VISION

We are a top-choice business partner of specialized products and logistics services.

MISSION

CUSTOMERS:

We commit a customer-centered approach in delivering quality products and services.

EMPLOYEES:

We continue to empower professionals through learning and development initiatives leading to career advancement.

SHAREHOLDERS:

We gear towards the efficient utilization of company resources to guarantee maximum profitability and continues business growth.

COMMUNITY:

We promote public awareness in the protection and conservation of our natural resources through our corporate social responsibility programs.

CORE VALUES

INNOVATION

SERVICE

EXCELLENCE

RESILIENCE

VERSATILITY

EMPOWERMENT

HERA BOARD

Your Smart Choice!



Fiber Cement Board

SIZE (MM) T x W x L	WEIGHT (KG)
3.5 x 1220 x 2440 mm	16
4.5 x 1220 x 2440 mm	21
6 x 1220 x 2440 mm / 3000 mm	28/34
9 x 1220 x 2440 mm	45
12 x 1220 x 2440 mm	62



Hera Interlock Senepa
Hera Interlock Roshia
Hera Interlock Mahoni




Hera Senepa
Hera Chanfro
Hera Mahoni
Hera Roshia



Hera Brick

Thickness	8-20 mm
Width	1200 mm (max)
Length	2400 mm (max)

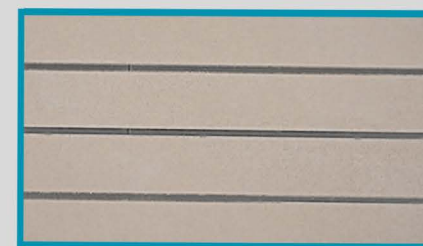

Hera Linea


Thickness	8-20 mm
Width	1200 mm (max)
Length	2400 mm (max)

100%
ASBESTOS FREE


100%
RAW MATERIALS



HERA DECK



HERA DEKO



PLANK & PLINT

TECHNICAL DATA

PROPERTY ITEMS	VALUE OF TEST	STANDARD
Tolerance of Thickness:		
≤ 10 mm	± 0.3 mm	ISO 8336 ; 2009
> 10 mm	± 5%	ISO 8336 ; 2009
Tolerance of Length	+0 ; -2 mm	ISO 8336 ; 2009
Tolerance of Width	+0 ; -2 mm	ISO 8336 ; 2009
Tolerance of Squareness	≤ 3 mm	ISO 8336 ; 2009
Tolerance of Straightness	≤ 1.5 mm	ISO 8336 ; 2009
Density	> 1.4 gr/cm ³	ISO 8336 ; 2009
Modulus of Rupture	> 100 kg/cm ²	ISO 8336 ; 2009
Water Absorption	23 -25 %	ASTM C1186
Water Content	6-9 %	ASTM C1186
Non combustible	Pass	BS 476 Part 4 :1970

ACCESSORIES



32mm 50mm 3.5mm 4.5-8mm 9-15mm 15-20mm

ADVANTAGES



*Customized dimensions & thickness options are available with conditions applied.